


TYRING WIRE IN BUCKETS



Cut and loops

single looped | double looped

soft galvanized/rolled

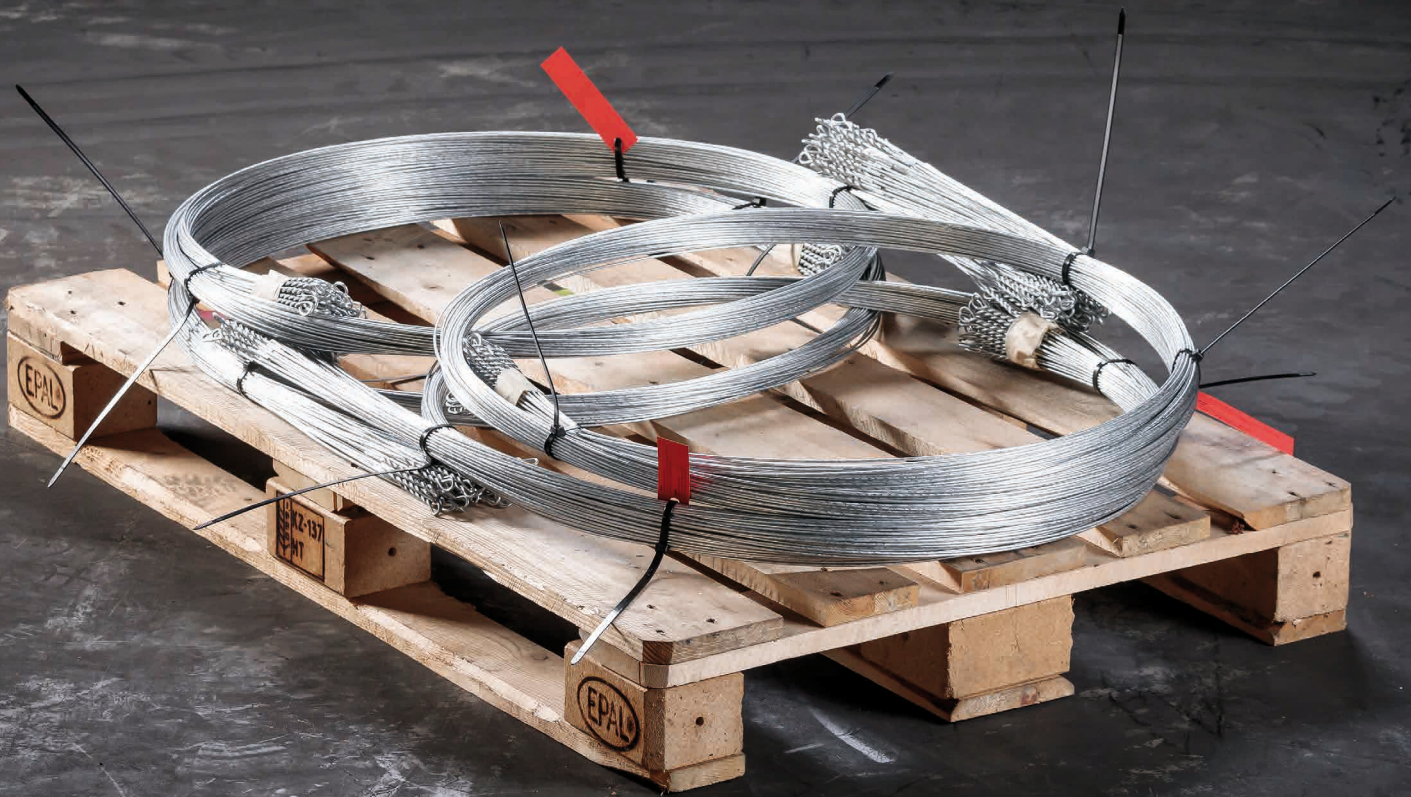

Everything about wires



Cut and loops soft galvanized (rolled version)

Soft galvanized tying wires with a twisted loop, rolled up in bundles of 53/45 pieces = approx. 10/12 kg, max. 780 mm outer diameter, packed on EUR pallets.

Double loops

Soft galvanized tying wires with two twisted loops, rolled up in bundles of 48 pieces = approx. 12 kg, max. 780 mm outer diameter, packed on EUR pallets.



Cut and loops single looped - soft galvanized

Quality

DIN EN ISO 16120-2, as per DIN EN 10218-2 / SAE1006 – SAE 1008

Technical data

Tolerance:	- 0.00 mm / + 0.08 mm
Size range:	2.00 mm – 3.40 mm
Length:	2,000 – 6,000 mm
Length tolerance:	- 0 / + 2 mm or per customer requirements
Galvanized coating:	min. 40 g/m ²


Dimensions

Loop head inner diameter:	min. 9.50 mm
Bundle outer diameter:	max. 780 mm

Packaging

Small bundles tied with cable ties and masking tape, packed in a large box on a EUR pallet = 3,975/2,700 pieces = 75/60 bundles, secured with a plastic strap or adhesive tape that can be removed without leaving any residue, provided with a warning sign.

Purchase quantities per customer requirements

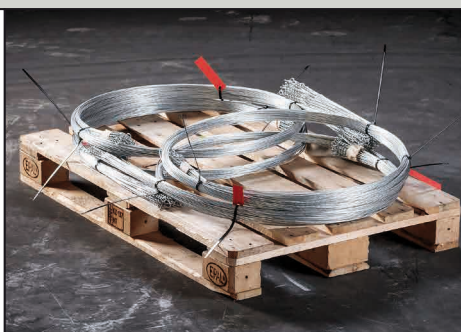

Rolled on pallet



Rolled in box on pallet



CONTACT US

 **Bracksieker**

Bracksieker Draht GmbH
Lammersbrink 24/25 | 49328 Melle
Telephone: +49 5427 9434-0
Telefax: +49 5427 9434-14
www.bracksieker.de | info@bracksieker.de

