

BALING WIRE



Rosette coils

galvanized

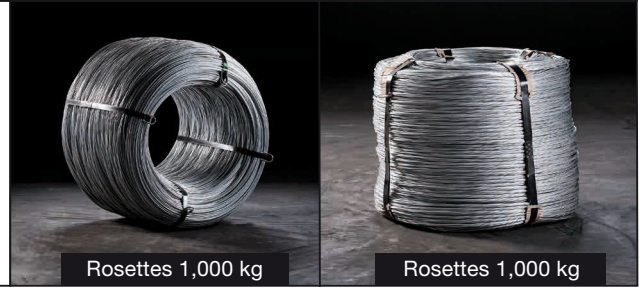


Everything about wires



Rosettes coils galvanised

Galvanised baling wire supplied in rosette coils, secured with four steel straps and lifting loops, waxed version.


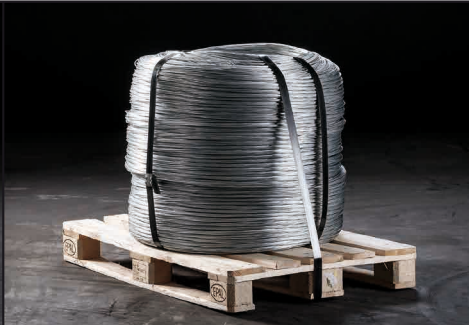


Quality
DIN EN ISO 16120-2, as per DIN EN 10218-2

Technical data	
Tensile strength:	950 – 1,100 N/mm ²
Tolerance:	- 0.00 mm / + 0.08 mm or per customer requirements
Size range:	2.00 mm – 3.40 mm
Galvanized coating:	40 g/m ²

Weight:	750 kg or per requirements
---------	----------------------------

Dimensions	
Inner diameter:	40 – 47 cm
Outer diameter:	78 – 87 cm
Coil width:	approx. 65 cm

Packaging	
Eye to the side	Loading sideways
Eye to the sky	Loading laid flat on disposable pallets if necessary
Supplied in coils 4x secured with steel straps	
	
	Eye to the side
	Eye to the sky



CONTACT US



Bracksieker Draht GmbH
 Lammersbrink 24/25 | 49328 Melle
 Telephone: +49 5427 9434-0
 Telefax: +49 5427 9434-14
www.bracksieker.de | info@bracksieker.de